


MANUAL WATER SOFTENER LT12



TECHNICAL DATA

Height . . . A mm 500
 Weight Kg 9,5
 Supply water pressure min 1 bar, max 8 bar
 Maximum flow rate recommended 1000 l/h
 Room temperature min 4°C - max 25°C
 Salt content per regeneration 1,5 kg

WATER NETWORK CONNECTIONS

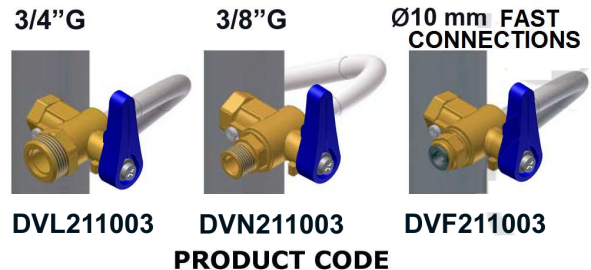

SUPPLY WATER CHARACTERISTICS

- Drinking water
- Temperature: min 4°C - max 25°C
- Crystal-clear water (SDI 1)
- Maximum hardness 90°f

THE PACKAGING CONTAINS:

- 1 steel AISI 304 cylinder holding 12 litres
- 8.5 litres of cationic resins adapt for softening
- 1 instruction manual
- 1 unloading pipe

LITRES OF SOFTENED WATER ACCORDING TO ITS HARDNESS						
°f	20	30	40	50	60	CYCLIC CAPACITY [m ³ .°f]
°d	11	16	22	28	33	
ppm CaCO ₃	200	300	400	500	600	
	2520	1680	1260	1008	840	50.4

THE WATER SOFTENER IS SUITED FOR:

