


Installation instruction

After opening the packing box, Please check if there is any damage caused by transportation. If there is any damage to the machine, please retain the packaging material, and notify the supplier within 7 days, then take out the manual, warranty card, and the machine surface spare parts which should be installed at site.

Selecting the appropriate location

Place the hood to the location of the convenient operation. The hood mounted with ceiling type, Mounting height should be at least 65cm above the gas stove, it is more appropriate between 65-75cm.

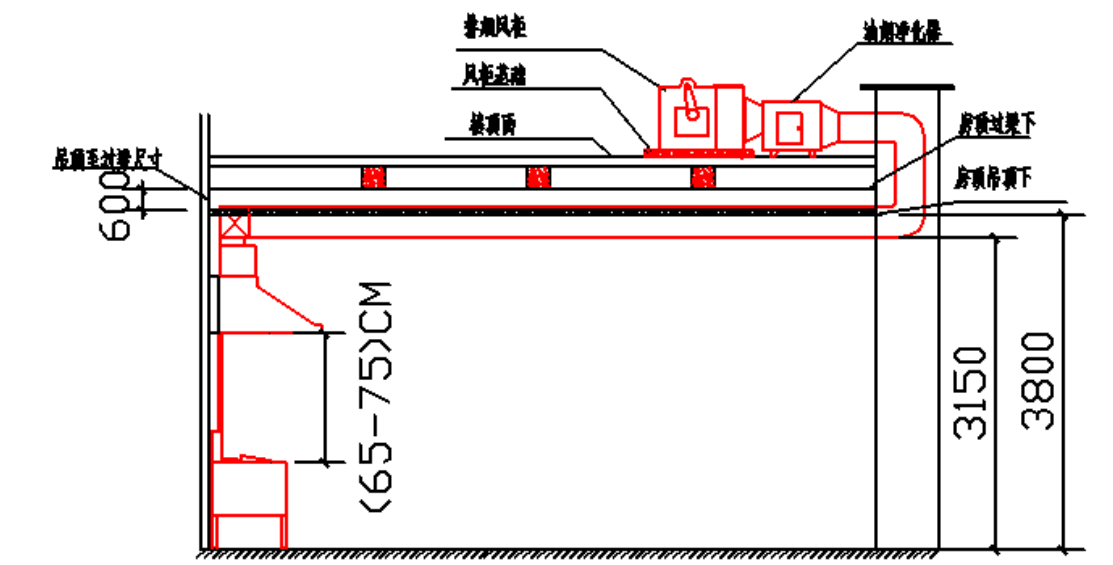

Installation steps

1. Fixed hood fixed plate: drill holes in mounting position, fix the accessory hood plate on the wall.
2. Hang the hood on the hood plate, fix with screws, make sure the hood without shaking and tripping problem, and try to keep as level as possible.
3. Install exhaust pipe: connect one end of the exhaust pipe with the hood outlet, and connect the other end with common flue or the hole of the external wall. if connect with common flue, do not insert the exhaust pipe too deep which resulted in increased exhaust resistance. If

connect with the hole of external wall, please make sure the pipe extend 30MM to avoid reinjection.

4. Install nozzle and screw on.